

# FOLDWAY SHUTTERS AND NOT RETURN DUST SEAL PNEUMATIC



**SASP Ø 140÷600 mm**

## TECHNICAL DATA


Galvanized or stainless steel.

The foldway shutters have the virtue to leave completely free the section of passage in open position.

The pin rotates on brass until Ø180 bigger diameters on bearing. The diaphragm is sealed with felt.

Maximum air speed: 35 m/s

ØSASP (mm)	Ø Pin (mm)	Diaphragm thickness (mm)	Body thickness (mm)	Rotation on	Pneumatic cylinder ATEX
140÷180	16	3	1,5	brass	Ø32x100
200÷280	16		1,5	bearing	Ø40x100
300÷480	20		2		Ø50x200
500÷580	25	4	3	bearing	Ø63x200
600	30		3		Ø80x200

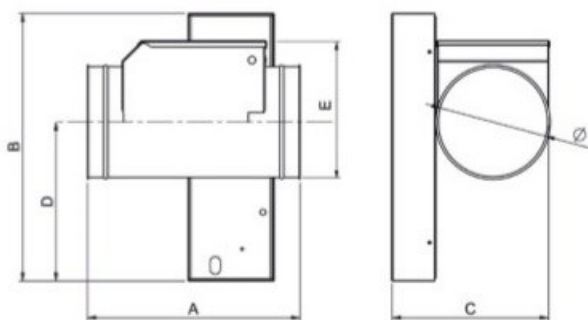

ØSASP (mm)	A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	Kg
150	430	510	95	308	227	6/7
200	480	510	95	285	272	10/11
250	530	510	95	260	322	13/15
300	580	735	95	435	372	18/21
350	630	735	95	435	422	22/26
400	680	735	95	435	472	27/31
450	730	735	95	360	522	30/34
500	780	735	95	335	570	54/62
550	830	735	95	310	620	70/78
600	880	785	80	315	670	80/90