


# PRESSED SASH SHUTTERS MANUAL



The sash shutters until  $\varnothing$  300 mm are made by two steel pressed parts (thickness 1,2 o 1,5 mm) welded together and galvanized. The diaphragm is made by pressed galvanized steel (thickness 1,2 o 1,5mm). Standard with edges. Maximum air speed : 35 m/s.  
AVAILABLE IN STAINLESS STEEL

-Possibility to mount pressed flanges only from  $\varnothing > 220$ mm

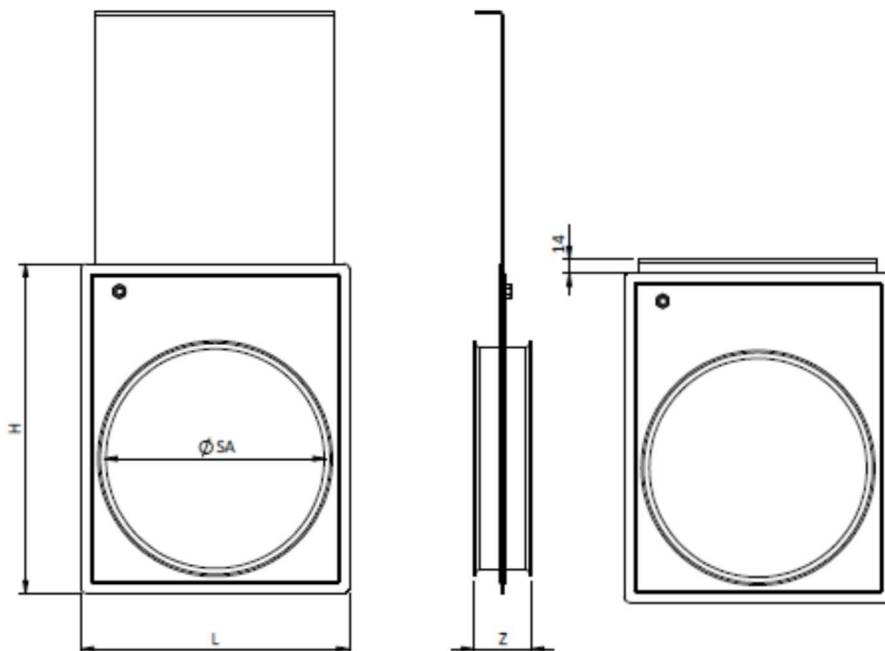

Ø	L	H	Z
80	120	150	40
100	145	190	50
120	165	210	50
140	180	220	50
150	190	237	50
160	205	245	50
180	220	280	50
200	240	310	50
220	260	330	65
240	280	340	55
250	290	362	65
260	300	370	75
280	320	390	65
300	345	410	80